5 é / Descriptions

n µ É xRK Ô Â … v 8 â ’ k F g 9 y < k 3 g v y ' k 9 3 (/ xož

Surface Mount Schottky Barrier Rectifiers, Reverse Voltage y 40V,Forward Current: 3.0A ,SMB package.

¤ ª / Features

z ô k ä | ä k ä 3 g ~ … v k n µ É x k —)í D }ož

Low power loss, High efficiency, High forward surge current capability, For surface mounted applications, HF Product.

Ð ÷ / Applications

%² " (ož

General purpose.

Ã W] Ô · / Equivalent Circuit




• Û - æ / Pinning



PIN	DESCRIPTION
1	Cathode
2	Anode


The recommended mounting pad size

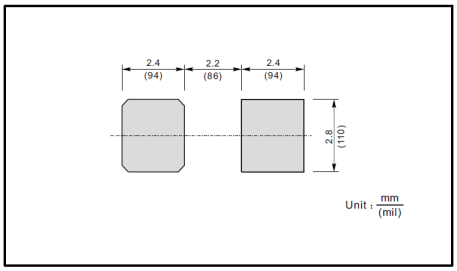


, M V / Marking

Type number	Marking
SSL34B	SSL34


Ô ? d • Ž ¢ / Electrical Characteristic Curve

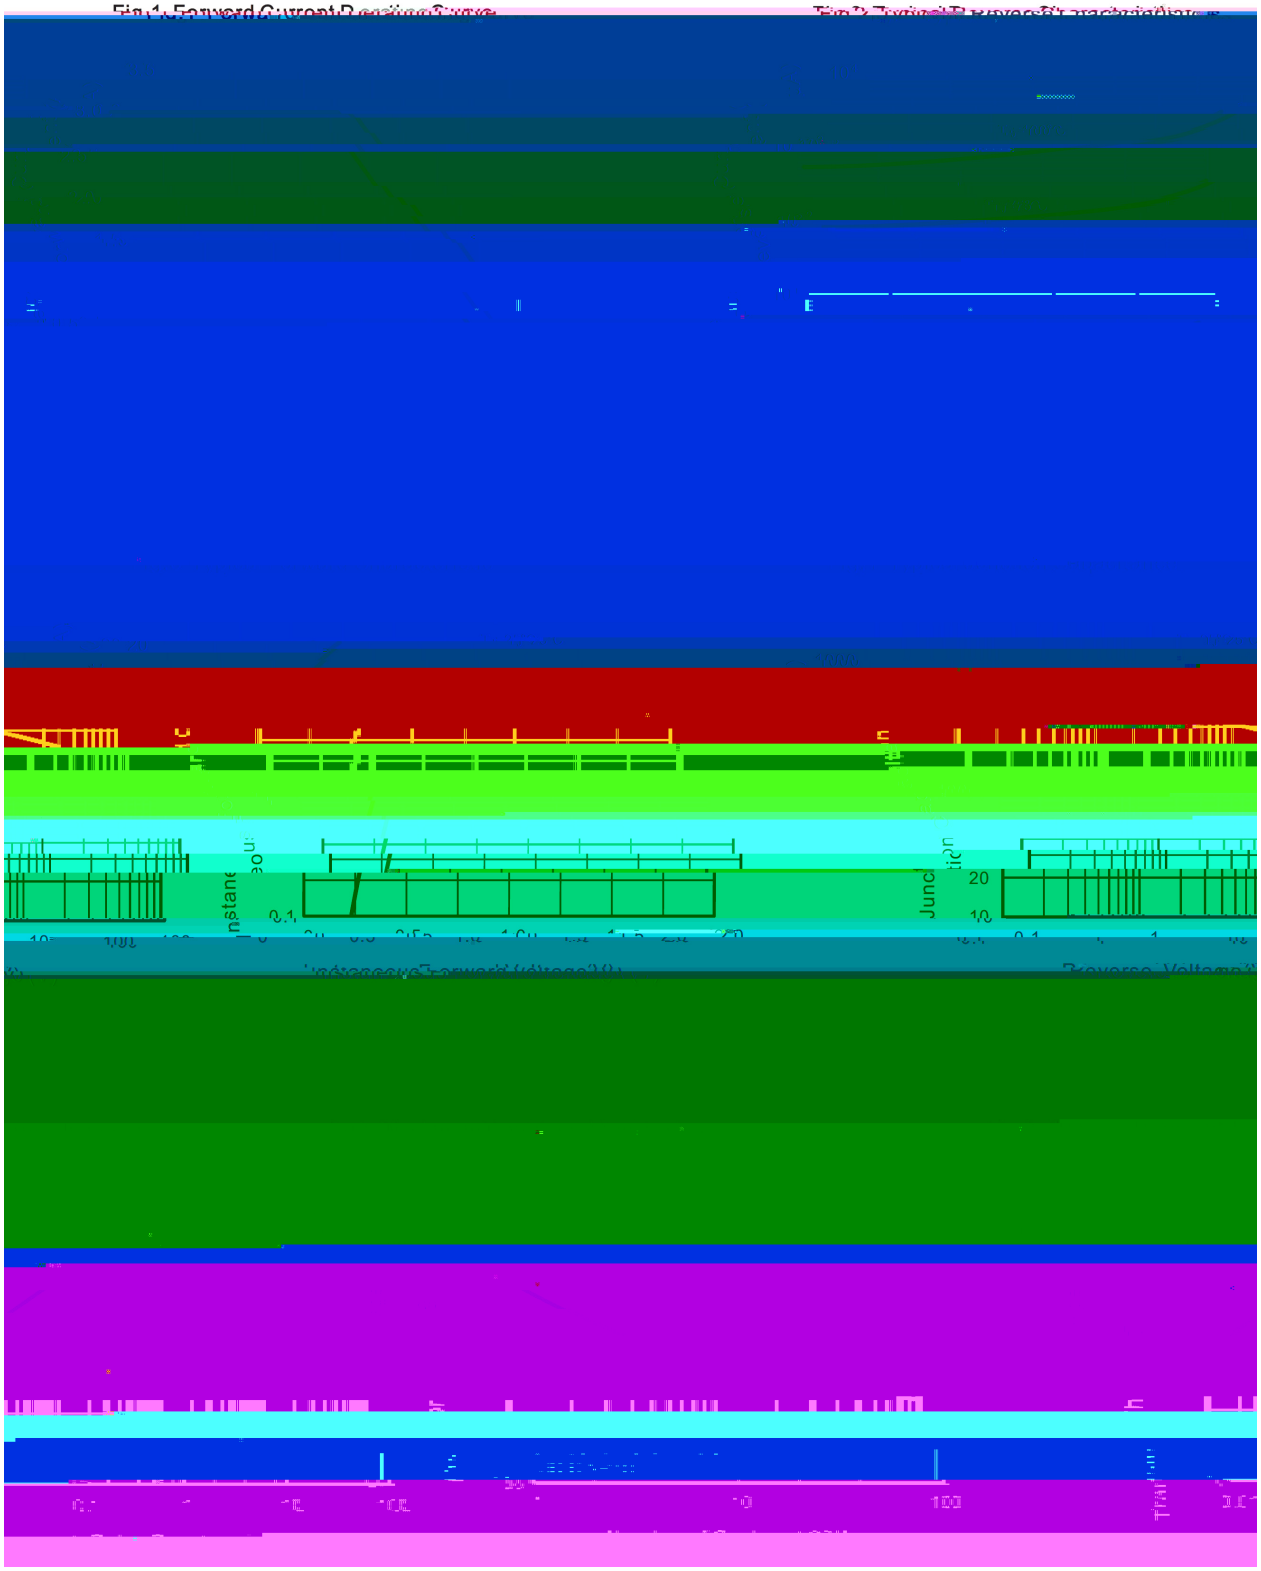

Ø ¤ =) ¢ / Package Dimensions

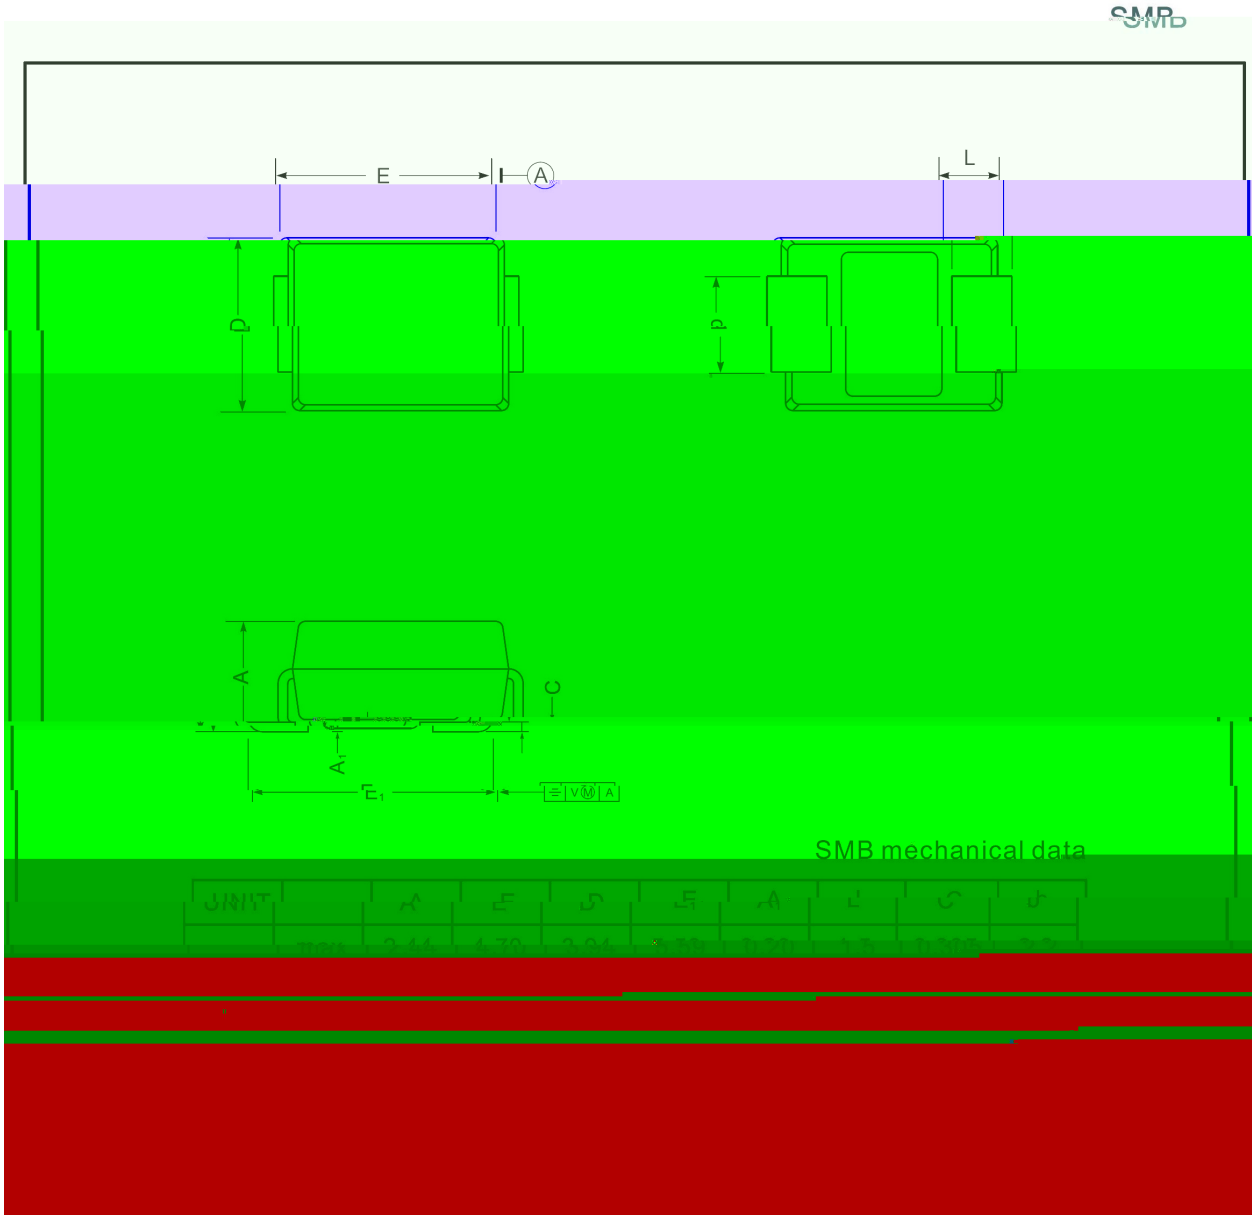

, M y ƒ / Marking Instructions

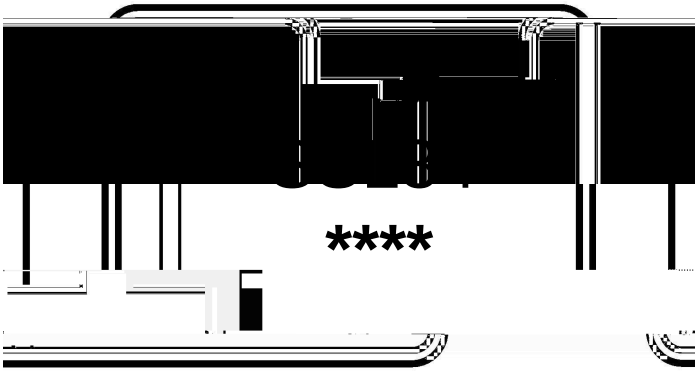

ª ¢ y

9 9 2 y º Z W A

**** y ÿ D Z W A k š ÿ D Z J

Note:

9 9 2 y	Product Type Code
**** y	Lot No. Code, code change with Lot No Code