
40V 5.0A SMA






| PIN | DESCRIPTION |
|---|---|
| 1 | Cathode |
| 2 | Anode |

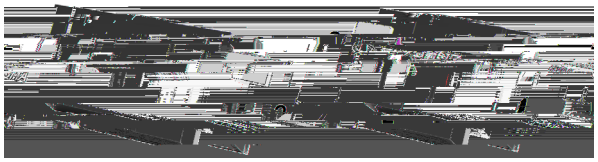

| | | | |
|---|---|---|---|
| | | | |
| | | | |
| | | | |

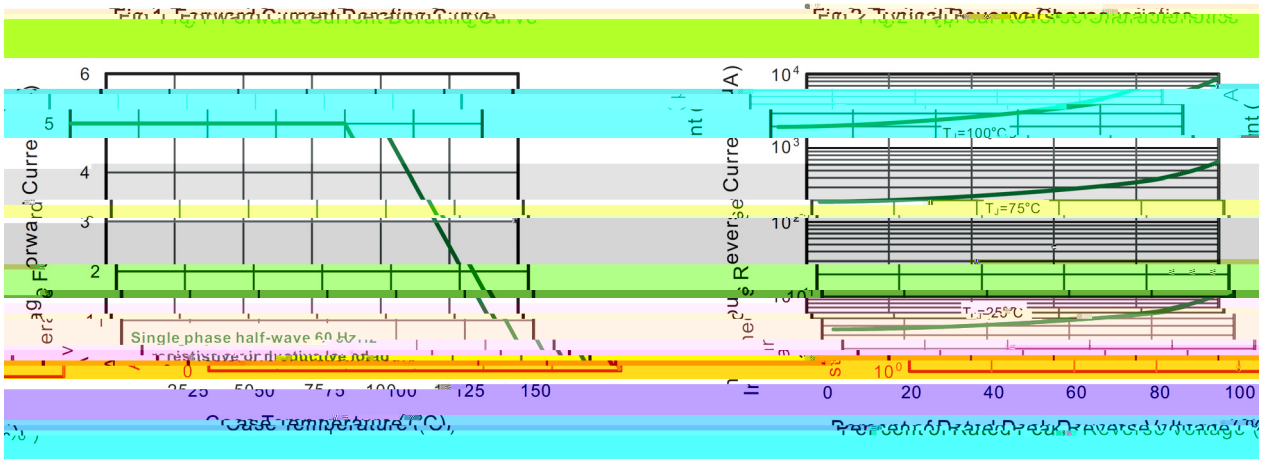

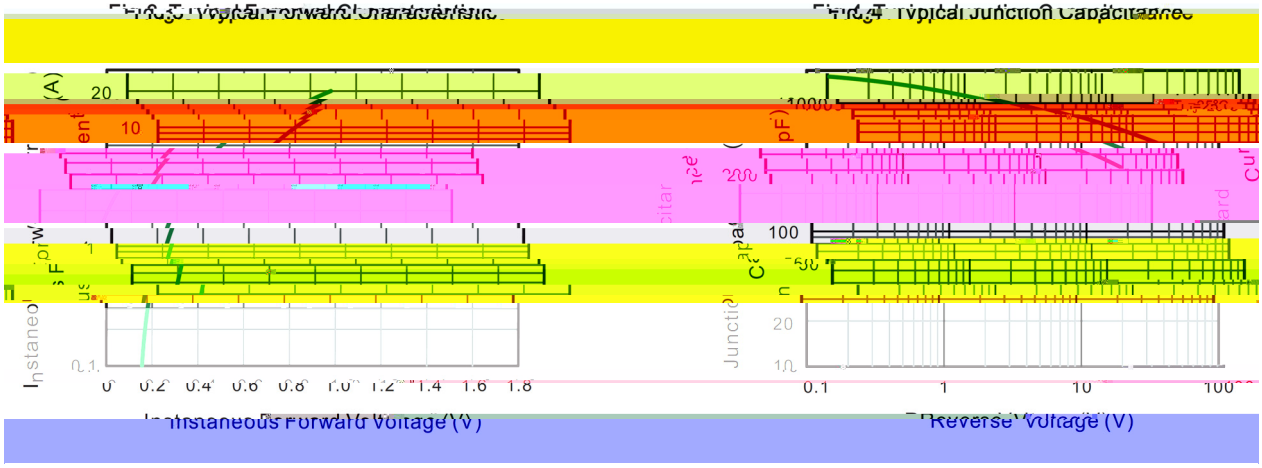




Fig.5 Maximum Non-Repetitive Peak Forward Surge Current



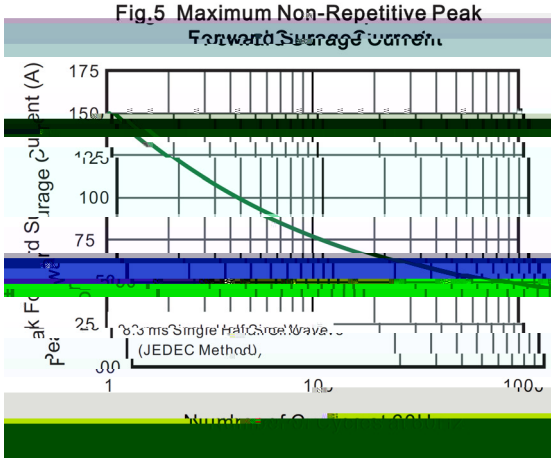



Fig.6- Typical Transient Thermal Impedance

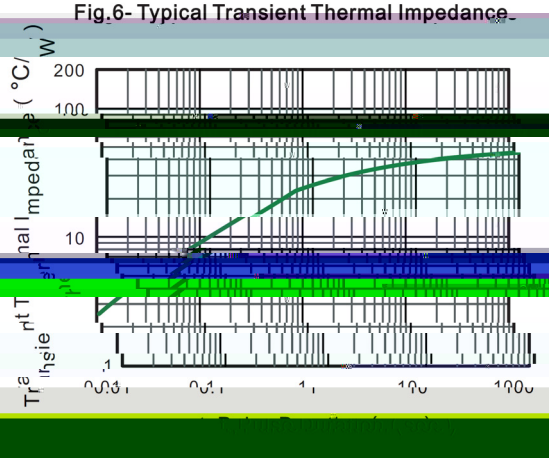

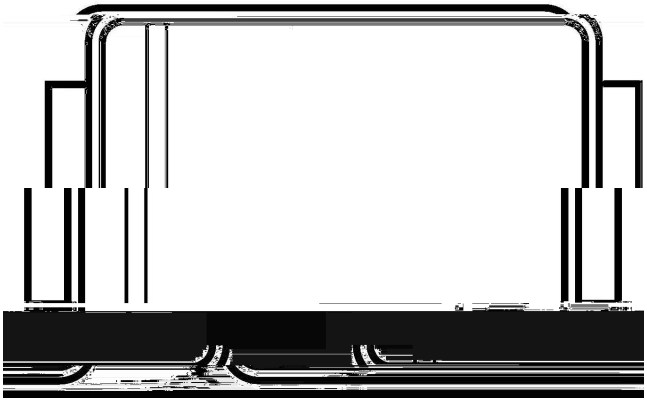

SSL54

SSL54