	2018-5				

B 2021-2-18 7


40~100V 5.0 SMC

Surface Mount Schottky Barrier Rectifier, Reverse Voltage：40 to 60 V, Forward Current:5.0A ,SMC
p


SSL54C~SSL510C

Rev.B Feb.-2021

/ Electrical Characteristic Curve

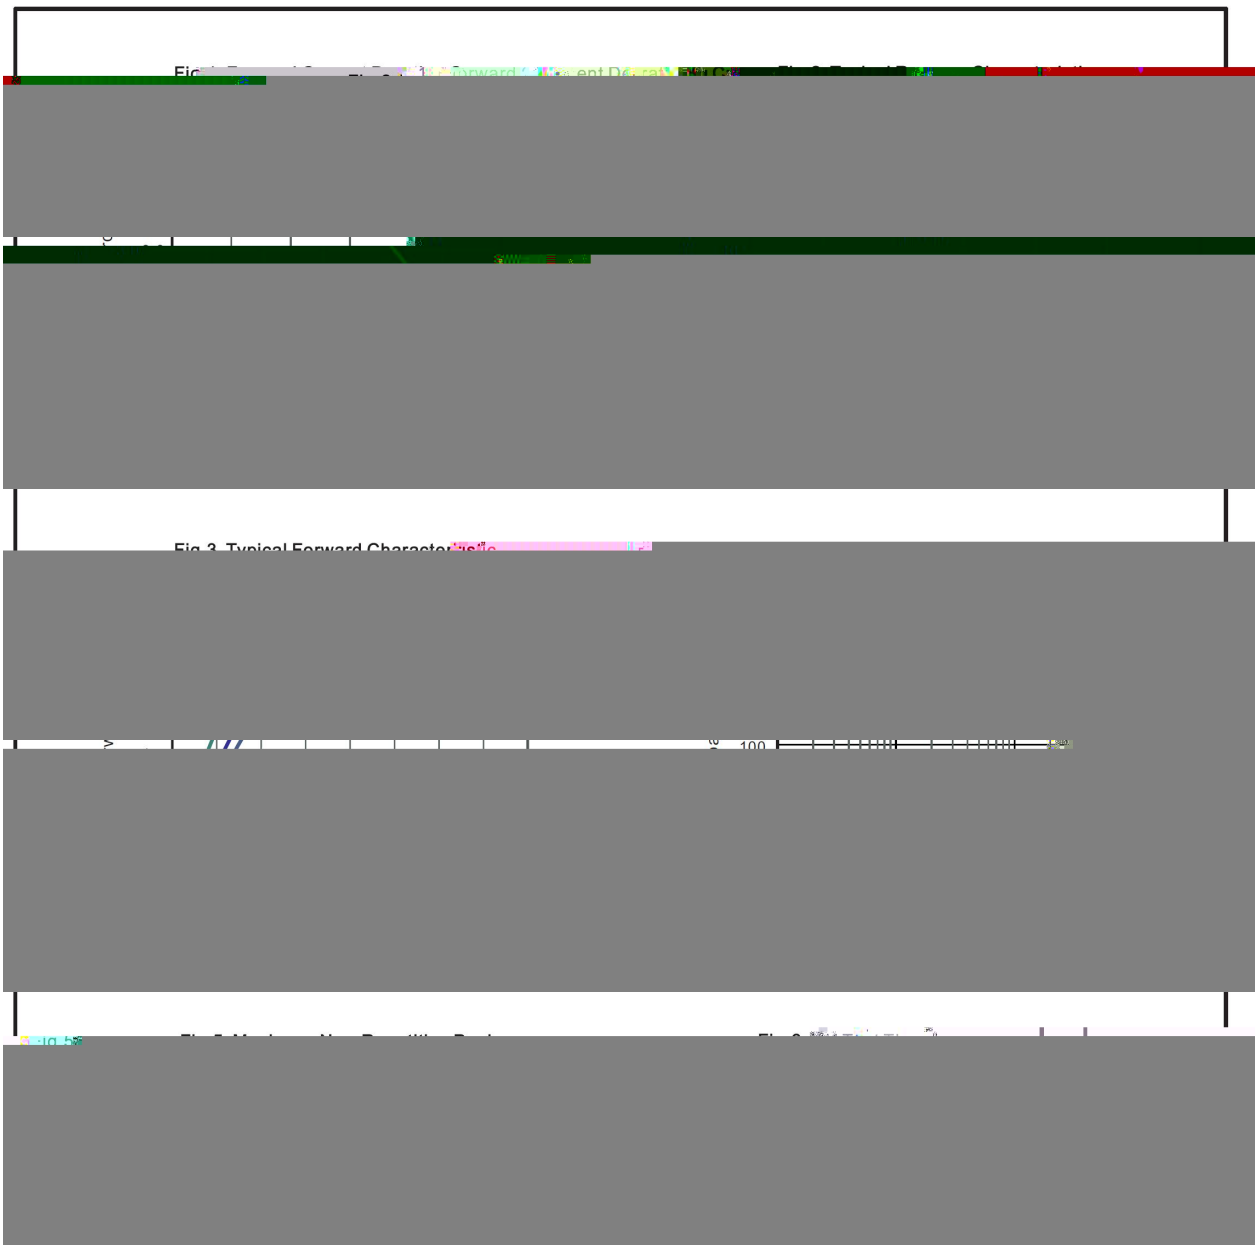

( ) /

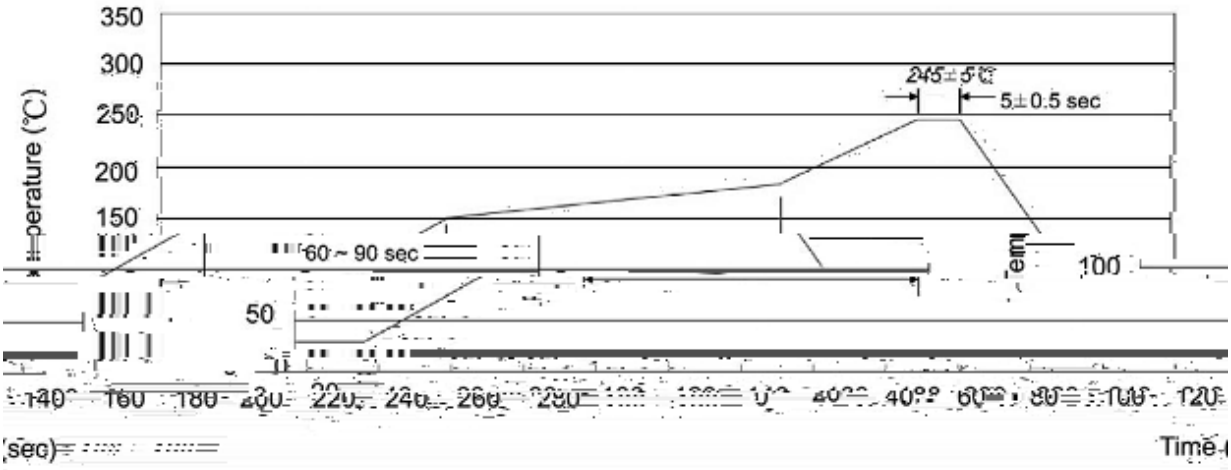

Note:

1 150 180 60 90sec;
1.Preheating:150~180℃, Time:60~90sec.

2 245±5 5±0.5sec;
2.Peak Temp.:245±5℃, Duration:5±0.5sec.

3 2 10℃/sec.
3. Cooling Speed: 2~10℃/sec.

/ Resistance to Soldering Heat Test Conditions

260±5℃ 10±1 sec. Temp.:260±5℃ Time:10±1 sec

/ Packaging SPEC.

/ REEL

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm^3)		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱