"Yت / Descriptions


◕ È / Features

100V~1000V 1.2A


٭ ﻱ / Applications

.

ภ ً ﴿ ≠ ع / Equivalent Circuit




ẵ ﺇ ﴿ً / Pinning



PIN	DESCRIPTION
1	Input Pin (~)
2	Input Pin (~)
3	Output Anode (+)
3	Output Anode

The recommended mounting pad size

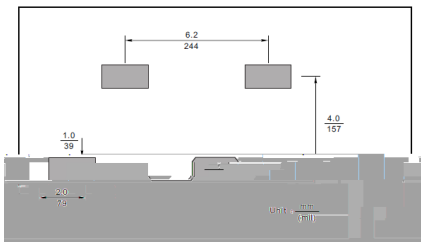

ﻁ. ﻫ ﺟ / Marking

	θ							

≠ ∃ Ã´E ∀ ƒ / Electrical Characteristic Curve

Fig.1 Average Rectified Output Current Derating Curve


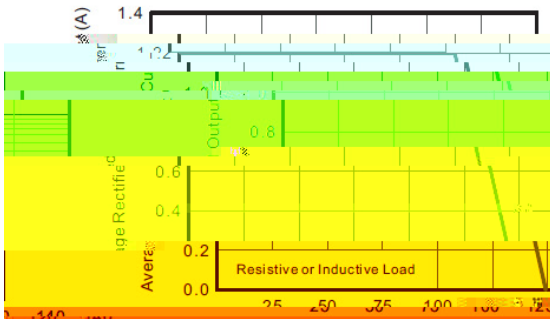



Fig.2 Typical Reverse Characteristics



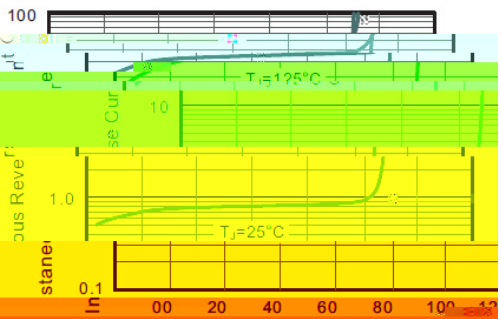

ᵘ Ė Ồ Ļ ƒ / Package Dimensions


ABS/LBF

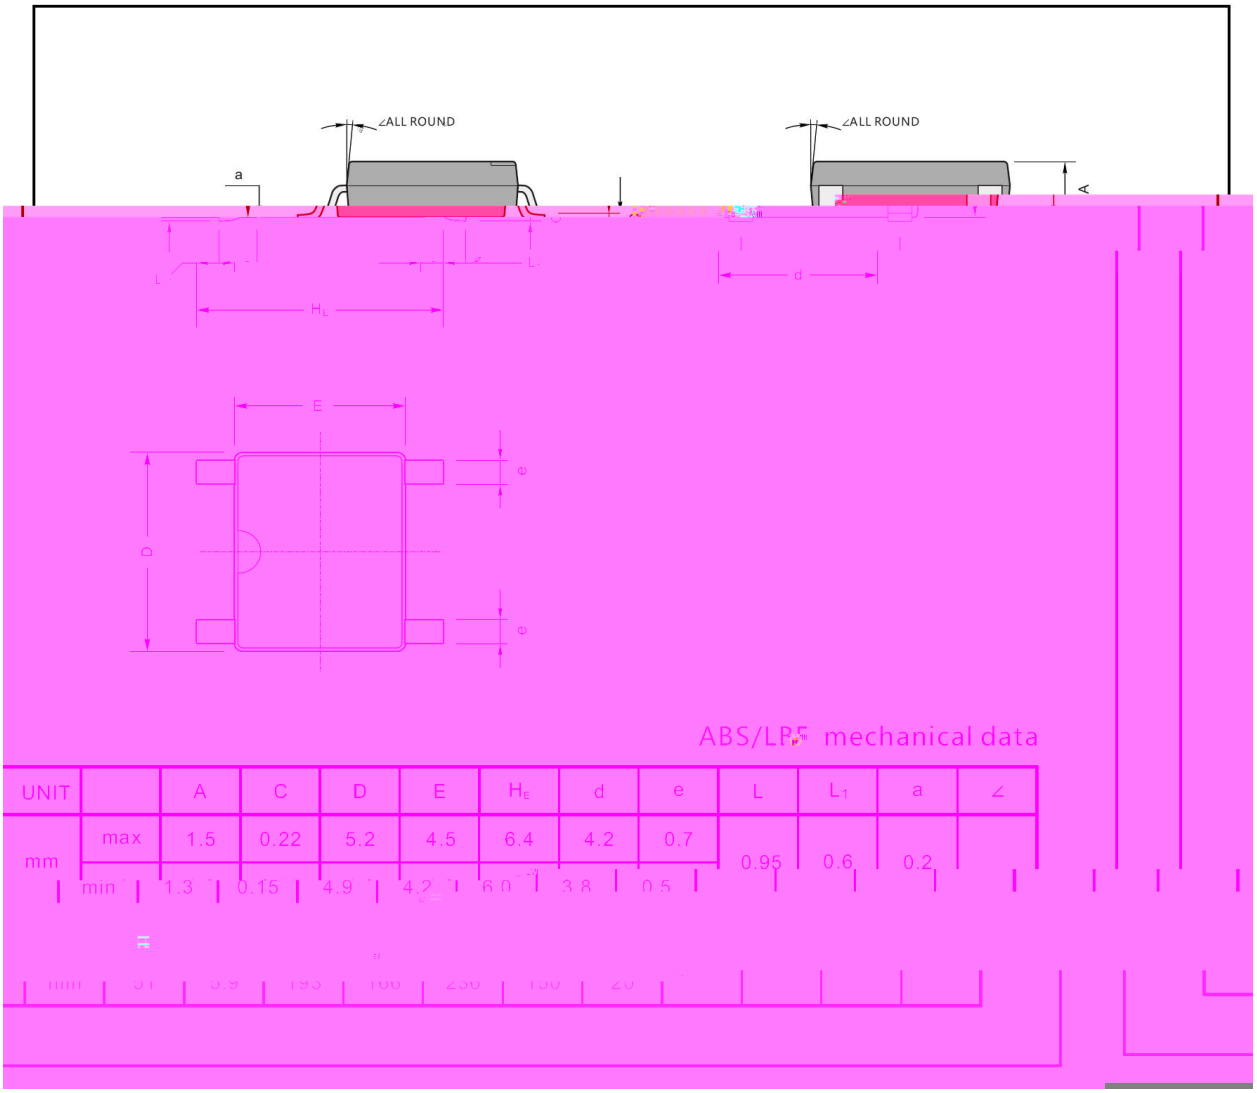

ABS/LBF mechanical data

UNIT		A	C	D	E	H_E	d	e	L	L_1	a	∠
mm	max	1.5	0.22	5.2	4.5	6.4	4.2	0.7	0.95	0.6	0.2	
	min	1.3	0.15	4.9	4.2	6.0	3.8	0.5				

Ł. Ļ Ω / Marking Instructions

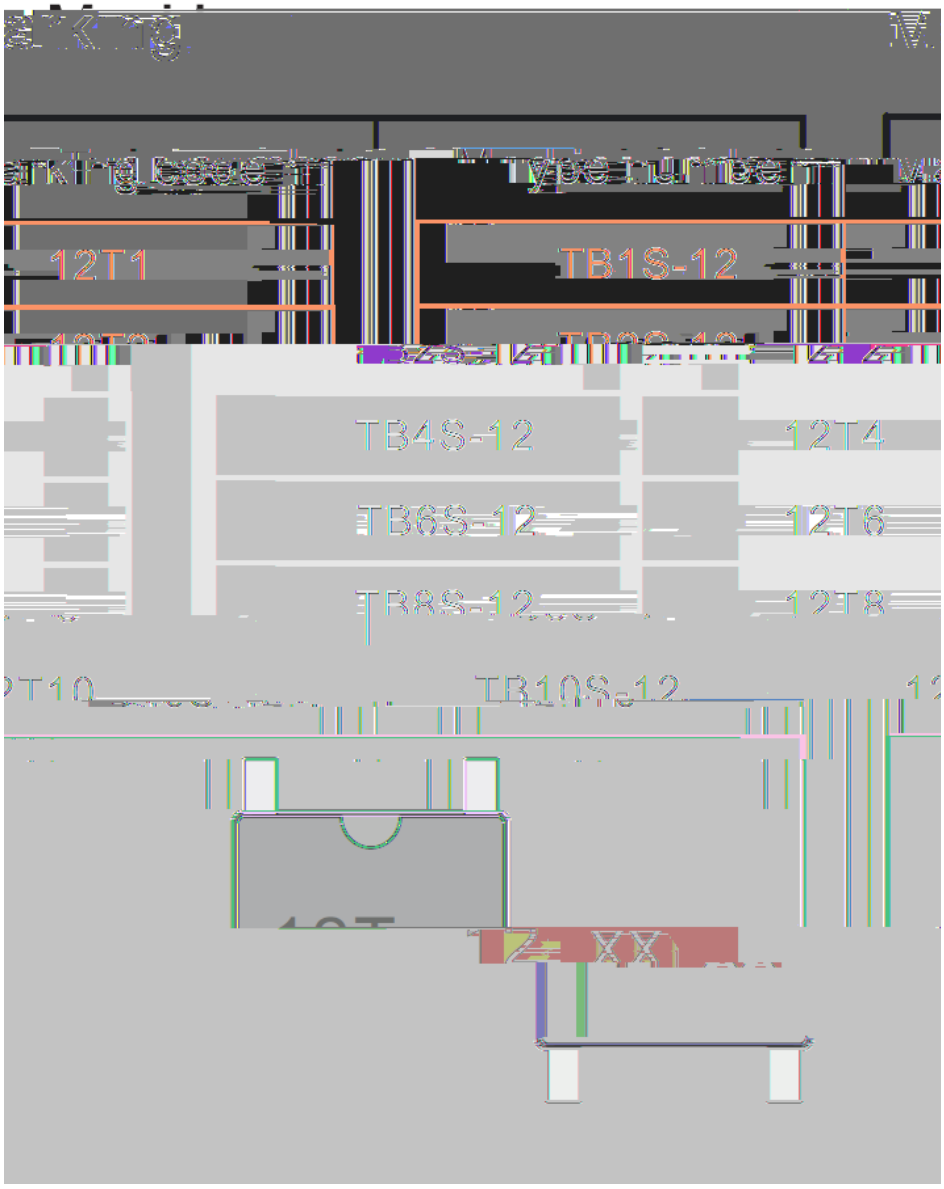

Ł. Ļ Ω / Marking Instructions

