

TT2190
Rev.F Mar.-2016


Parameter	Symbol	Rating	Unit
Collector to Base Voltage	$V_{CBO(sus)}$	1500	V
Collector to Emitter Voltage	V_{CEO}	800	V
Emitter to Base Voltage	V_{EBO}	6.0	V

/ Electrical Characteristic Curve




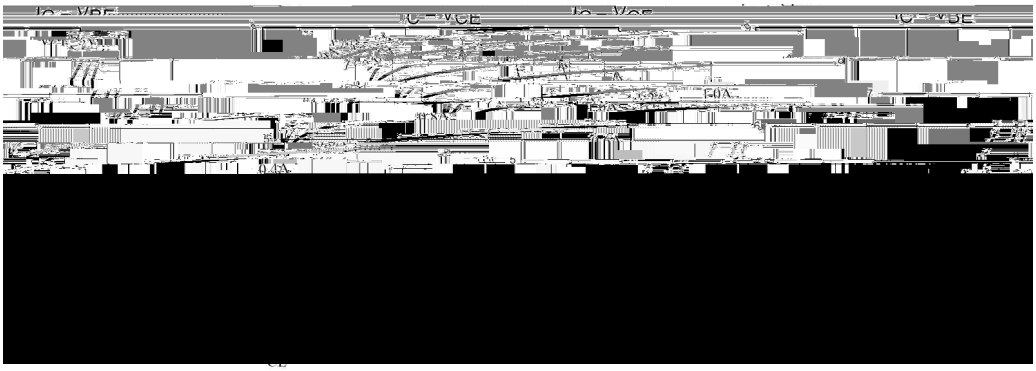

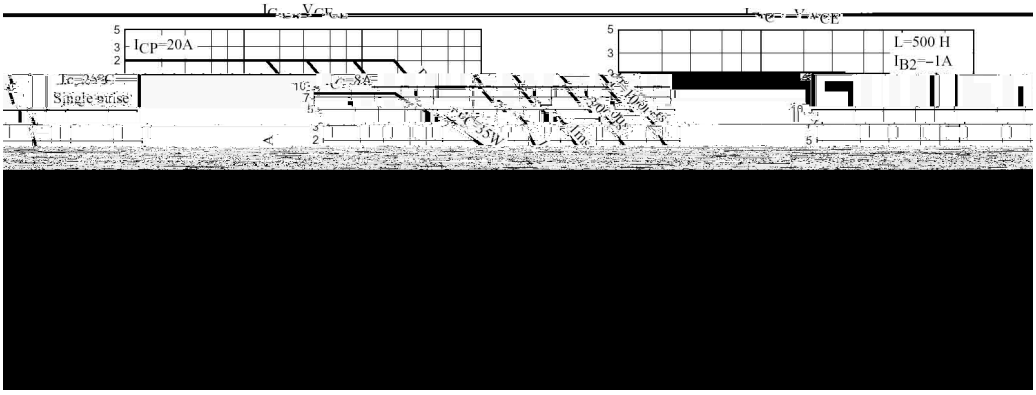


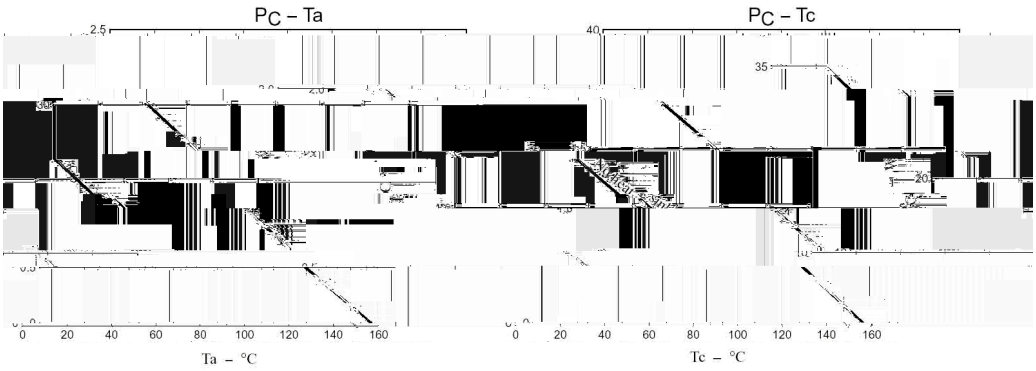

/ Package Dimensions

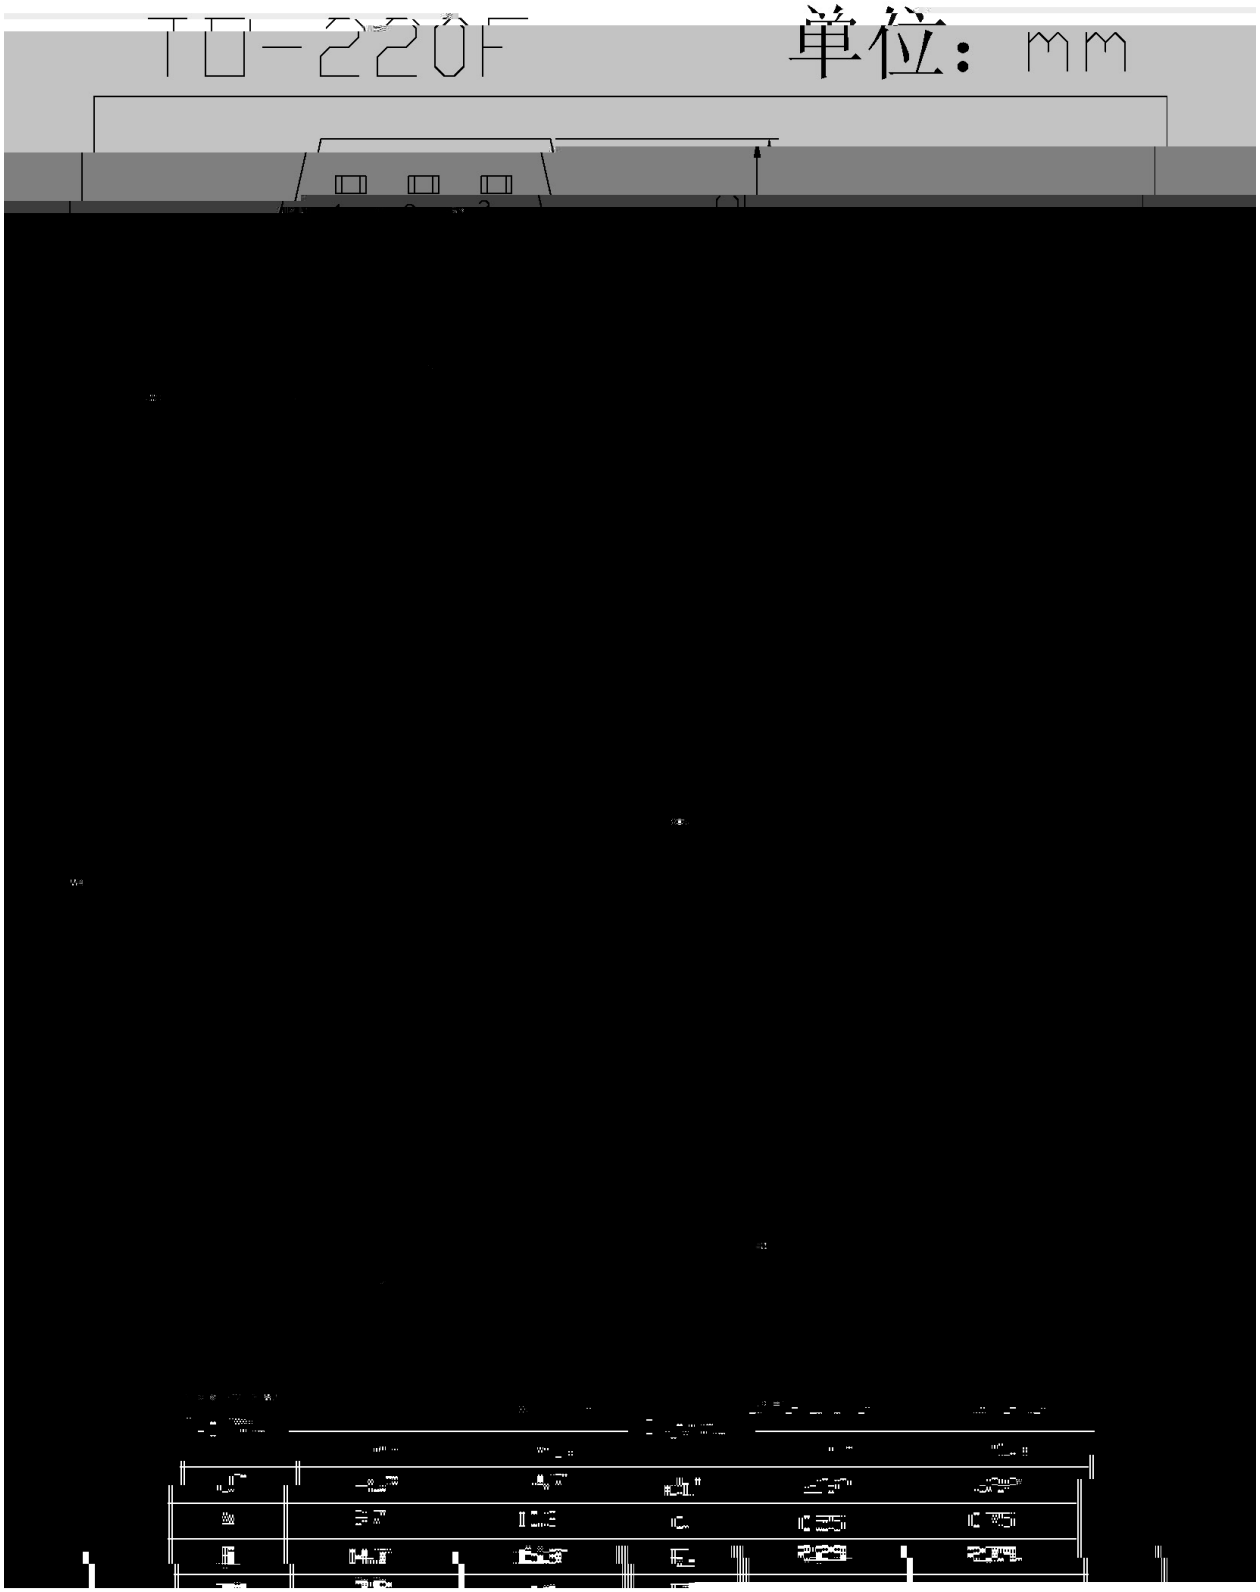


/ Marking Instructions

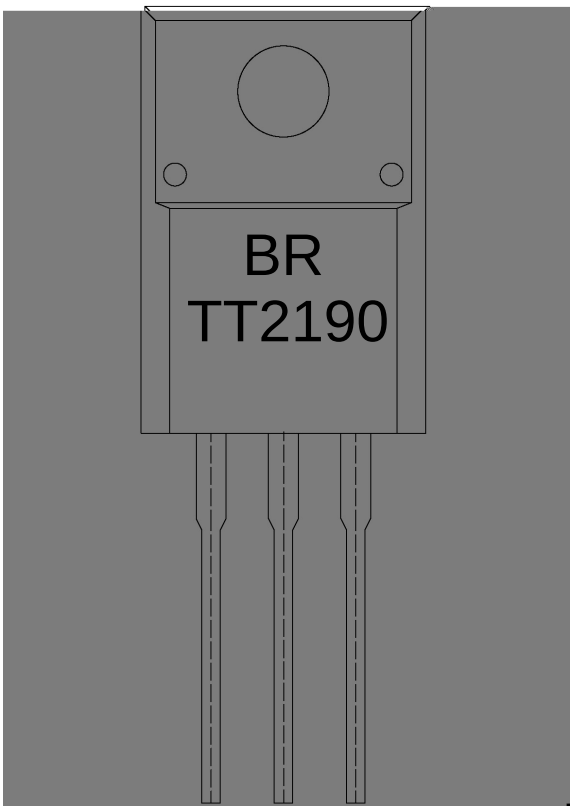

Note:

BR:	Company Code.
TT2190:	Product Type.
****:	Lot No. Code, code change with Lot No.

( ) / Temperature Profile for Dip Soldering(Pb-Free)

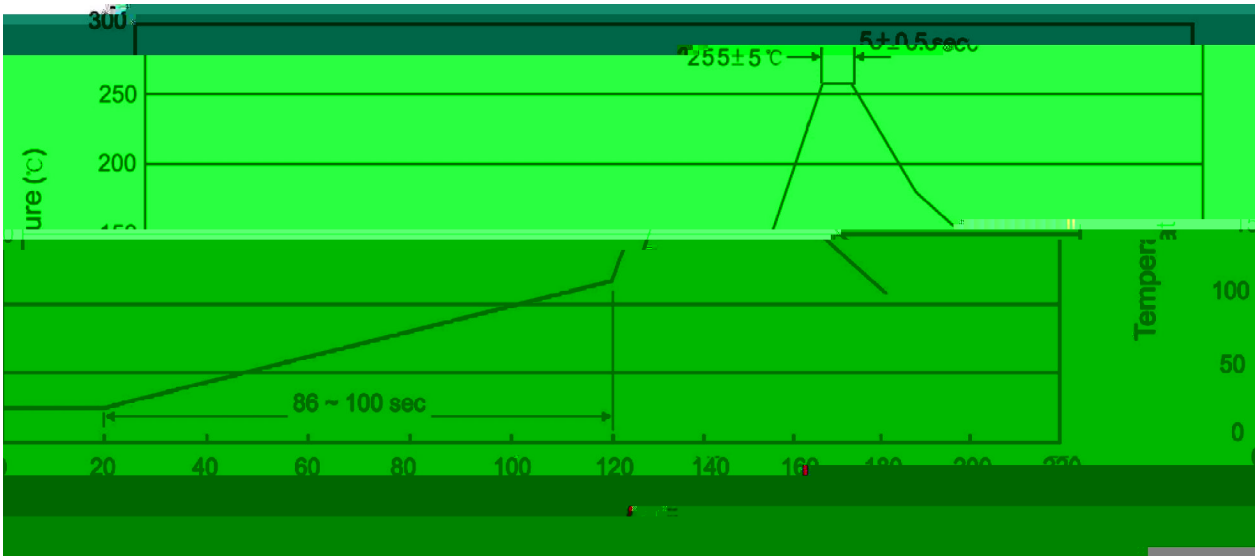

						Note:	
1		25	150		60	90sec;	1.Preheating:25~150 , Time:60~90sec.
2		255	5			5 0.5sec;	2.Peak Temp.:255 5 , Duration:5 0.5sec.
3				2	10	/sec.	3. Cooling Speed: 2~10 /sec.

/ Resistance to Soldering Heat Test Conditions

270	5		10	1 sec.	Temp.:270±5 Time:10±1 sec

/ Packaging SPEC.

/ BULK

Package Type	Units					Dimension		(unit mm^3)

/ TUBE

Package Type	Units					Dimension		(unit mm^3)

/ Notices